

REV.	DESCRIPTION	DATE	DESIGN
------	-------------	------	--------

PIN19 PIN18

PIN2 PIN1

High Speed HDMI™ Cable with Ethernet E358026 AWM STYLE 20276 80°C 30V VW-1


PIN1 PIN2

PIN18 PIN19


P1

P2

PIN Assignment

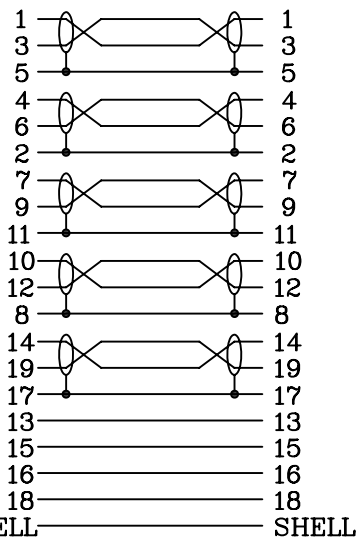

LOGO Size

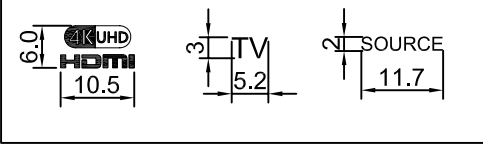

1. Test Condition:
 - (1) 100% OPEN & SHORT TEST;
 - (2) Insulation Resistance: DC300V 5MΩ(Min) ;
 - (3) Conductor Resistance: 5Ω/Max.
 - (4) Hi-Pot:DC 300V/0.1s.
2. The product is ROHS compliant.
3. HDTV-DVD TEST:4K@60Hz

Client NO	GC-HHL18-20
Length	6100±50mm(20FT)

⑥	MESH	Nylon Mesh	PCS	1	
⑤	INNER MOLDED	PE	g	15	
④	SHELL	HDMI AM zinc alloy Shell,Metal Gun Colour.	PCS	2	
③	CON	HDMI AM Gold Plated Connector	PCS	1	
②	CON	HDMI AM Gold Plated Connector,with IC-HT8181	PCS	1	
①	CABLE	[(28AWG+FPE)*2C+D+HDPE+AL-foil]*5P+(28AWG+HDPE)*4C+AL+AEB+Black PVC OD7.3mm	PC	1	
NO.	ITEM	DESCRIPTION	UNIT	Q'TY	Notes

		<h1>MY CABLE MART LLC</h1>							
X.±0.20						Drawing No.		JXD-HD1112/G/BK/28AWG+IC/WA	
.X±0.15						REV	A/O	Title	HDMI AM-AM
.XX±0.10		Scale	/	Customer	1-39	Checked			
		Page	1/1	Item No.	-	Sales			
Unit	mm	Date	2021/10/27		Approval				