
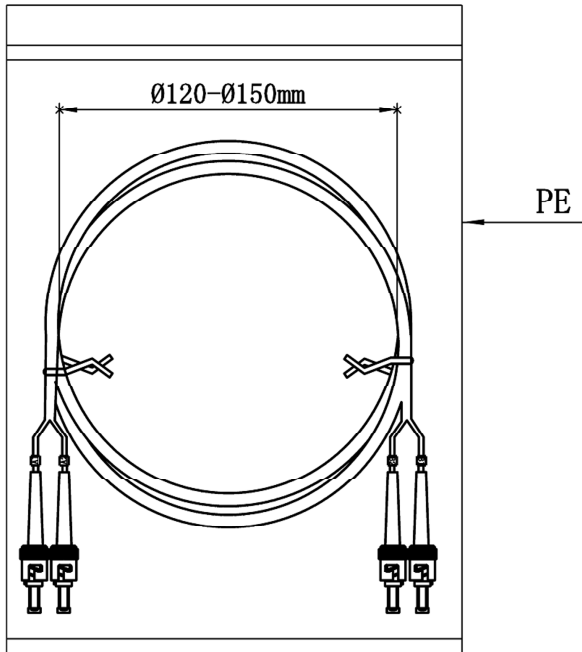


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

| REVISION INFORMATION |           |             |                   |
|----------------------|-----------|-------------|-------------------|
| Rev.                 | Rev. Date | Modified By | Brief Description |
|                      |           |             |                   |

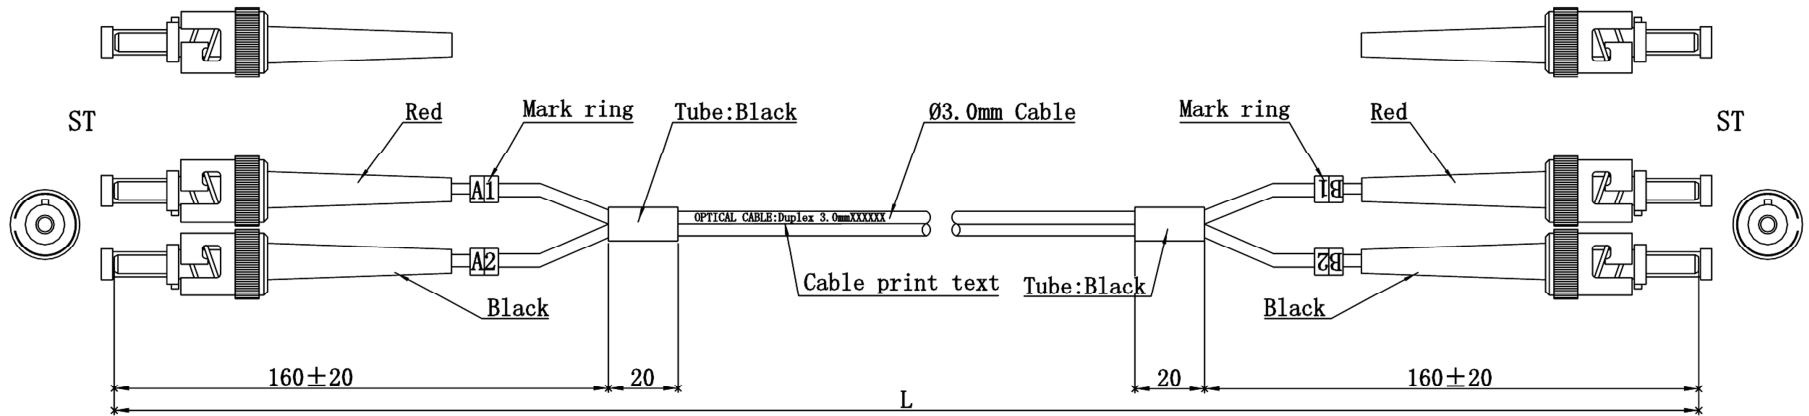

Specifications:

|                            |               |
|----------------------------|---------------|
| Type                       | ST/UPC-ST/UPC |
| Fiber Mode                 | OM3           |
| Core Diameter (um)         | 50/125        |
| Operating Wavelength(nm)   | 850/1300      |
| Cable Color                | Aqua          |
| Cable Diameter (mm)        | Ø3.0          |
| Operating Temperature(° C) | -40~+75       |
| Storage Temperature(° C)   | -40~+85       |
| Insertion loss (dB)        | ≤0.2dB        |
| Return loss (dB)           | ≥35dB         |
| ST Connector Color (Boot)  | Red/Blcak     |

L ≤ 5m, TOLERANCES: 0 ≤ ΔL ≤ 5cm  
 L > 5m, TOLERANCES: 0 ≤ ΔL ≤ 1%\*L

| Length | Item # |
|--------|--------|
| 1m     | 102646 |
| 2m     | 102647 |
| 3m     | 102648 |
| 5m     | 102649 |
| 10m    | 102650 |
| 15m    | 102651 |

| ①   |           |                           |     |      |  |
|-----|-----------|---------------------------|-----|------|--|
| ②   |           |                           |     |      |  |
| ③   |           |                           |     |      |  |
| NO. | PART NAME | SPECIFICATION DESCRIPTION | QTY | UNIT |  |

Unless specified on the drawing, tolerances are per the follows:  
 .x +1  
 .x +0.2  
 .xx +0.05

|             |                  |                                     |         |
|-------------|------------------|-------------------------------------|---------|
| DRAWN BY    | DATE: 2015/05/14 | DESCRIPTION: ST-ST-DX OM3 Patchcord |         |
| CHECKED BY  | SHEET 1of1       | ITEM NO.                            |         |
| APPROVED BY | SCALE 1:1        | REV. 00                             | UNIT:mm |