
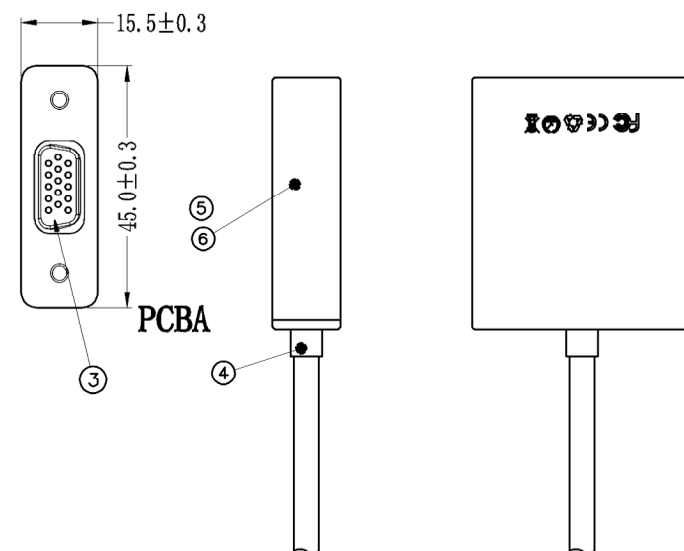


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

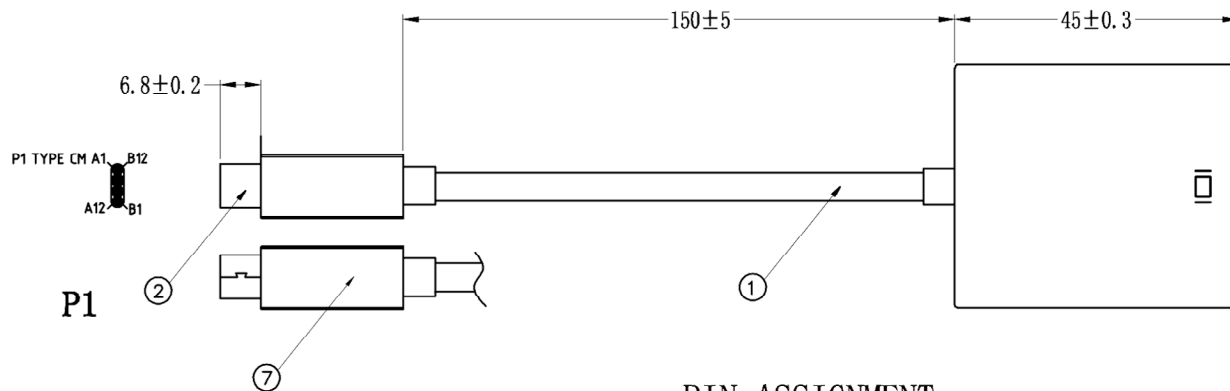

PIN ASSIGNMENT			
P1		PCBA	
A11	orange	orange	A11
A10	brown	brown	A10
5V	red (#26)	red (#26)	5V
A7	white	white	A7
A6	green	green	A6
GND	black (#26)	black (#26)	GND
A8	purple	purple	A8
A5	orange	orange	A5
B5	blue	blue	B5
B8	yellow	yellow	B8
B3	black	black	B3
B2	blue	blue	B2
SHEEL	grand	SHEEL	

The electrical performance test :
 (Real machine testing Type C to VGA)
 1.Signal Source PC: 1080P
 2. Video Imaging signal jitter - free,
 no trailing, no ghosting,
 no missing colors etc.
 3.TV or monitor: 1080P

⑦	small shell	ABS white, shiny finish	1	PCS
⑥	big shell	ABS white, shiny finish	1	PCS
⑤	VGA baffle	ABS white, shiny finish	1	PCS
④	SR	PVC45Pa/white	1	PCS
③	VGA female	gold-plated steel casing, grey plastic Insulator, gold-plated terminal	1	PCS
②	TYPE C male	nickle-plated steel casing, black plastic Insulator, gold-plated terminal	1	PCS
①	Cable	7/0.08T*1P+D+AL+HM)*4C+7/0.08T*1P+7 0.08T*4C+7/0.16T*2C+AB OD: 4.5±0.2 MM PVC white	1	PCS
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

My Cable Mart, LLC

DRAWN BY	DATE: 2016-01-23	DESCRIPTION: TYPE C TO VGA
CHECKED BY	SHEET 1 of 2	ITEM NO. 184049
APPROVED BY	SCALE	REV. 00 UNIT: mm