



9150±100mm(30FT)

E358026 AWM STYLE 20276 80°C 30V VW-1 HIGH PERFORMANCE DVI-D CABLE

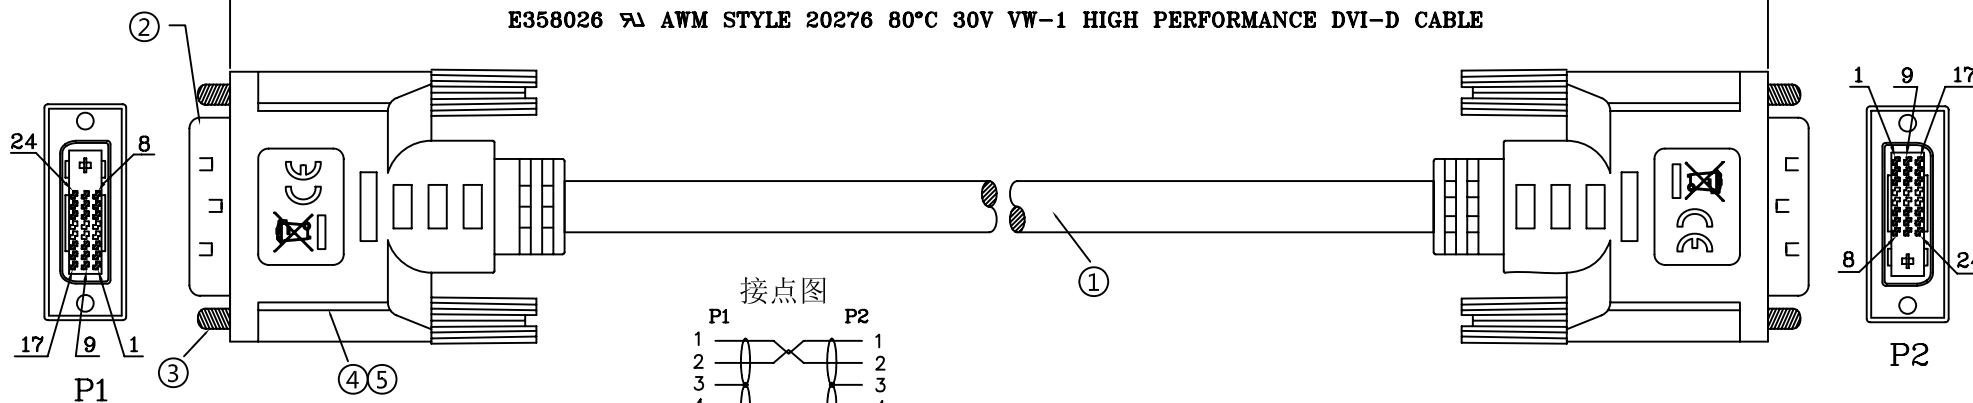

接点图

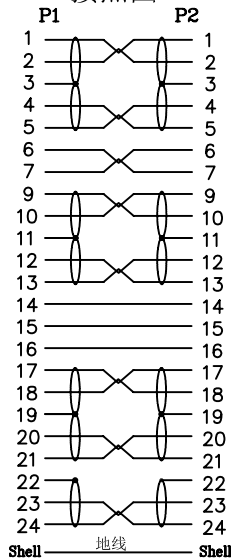

**ELECTRICAL TESTING:**  
 (1)100% open short &miss wire test.  
 (2)Insulation Resistance:5MΩ.  
 (3)Contact Resistance:5 Ω .  
 (4)Dielectric Strength:DC 300V/0.1s.  
 (5)HDTV-DVD(1080P):100%.Testing Line Process.

⑤	OUTER MOLDED	45P Black PVC	g	12	
④	INNER MOLDED	PE	g	8	
③	SCREW	DVI Screw,Nickel Plater, L43.2*USA4-40/Φ2.8	PCS	2	
②	CON	DVI 24+1 Gold Plated Connector	PCS	2	
①	CABLE	[(26AWG+FPE)*2C+D+AL-foil]*7P+(28AWG+HDPE)*5C+AEB+Black PVC OD9.0mm	PC	1	
NO.	ITEM	DESCRIPTION	UNIT	Q'TY	Notes

X.±0.20		<b>MY CABLE MART LLC</b>			
.X±0.15					
.XX±0.10		Drawing No.	JXD-DV1001/G/BK/26AWG		
REV	A/O	Title	DVI 24+1 M-M	Draw	Song
Scale	/	Customer	1-39	Checked	
Page	1/1	Item No.	GC-DD-30	Sales	
Unit	mm	Date	2021/06/29	Approval	