

SPEC:


1. CABLE UL20276 (1P*32AWG+AL+D+MYLAR)*5C+4C*32AWG+1C*28AWG+MYLAR
+AL+D+B COLOR:WHITE IMPEDANCE:100Ohm OD:4.8MM
2. CONNECTOR:MINI DISPLAYPORT 20PIN PLUG ASSEMBLY TYPE(OUTER COVER:WHITE ABS)
SHELL GOLD FLASH
3. CONNECTOR:HDMI 19P A TYPE MALE SHELL GOLD FLASH WITH PCBA
4. DUST CAP
5. MOLDING PVC WHITE IN COLOR

REV	DATE	PROJECTION	DRAWN BY	CHECKED BY	SALES	APPROVAL BY	My Cable Mart LLC	MDPHDMI-6MM	CUSTOMER	Codes	SHEET NO.
A/0											
			SCALE:	UNIT:MM	DATE: 2011/01/12						


PINOUT:

MINI DP PLUG (SOURCE) ——— PCB ——— HDMI TYPE A MALE (SINK)

[ML_LANE 0(P)]
 [ML_LANE 0(N)]
 [GND]
 [ML_LANE 1(P)]
 [ML_LANE 1(N)]
 [GND]
 [ML_LANE 2(P)]
 [ML_LANE 2(N)]
 [GND]
 [ML_LANE 3(P)]
 [ML_LANE 3(N)]
 [GND]
 [AUX_CH (P)]
 [AUX_CH (N)]
 [GND]
 [HOT PLUG DETECT]
 [CONFIG 1]
 [CONFIG 2]
 [GND]
 [DP PWR]

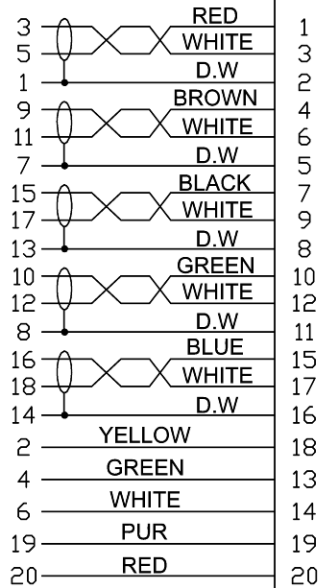

PCBA

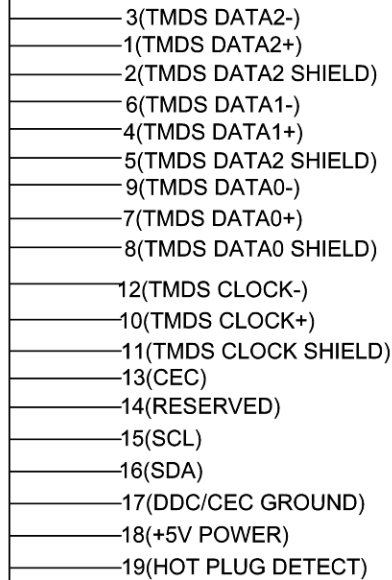

SHELL ——— SHELL

REV	DATE	PROJECTION	DRAWN BY	CHECKED BY	SALES	APPROVAL BY	My Cable Mart LLC	MDPHDMI-6MM	CUSTOMER	Codes	SHEET NO.
A/0											
			SCALE:	UNIT:MM	DATE: 2011/01/12						2/2