

1	2	3	4	5	6	7	8			
CUSTOMER	CUST P/N	RoHS Compliant		REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD
My cable mart	TABLE A	18-94194353~56		2.0		⚠	變更18-94194353-56裝箱數量	2011/3/23	jerry	


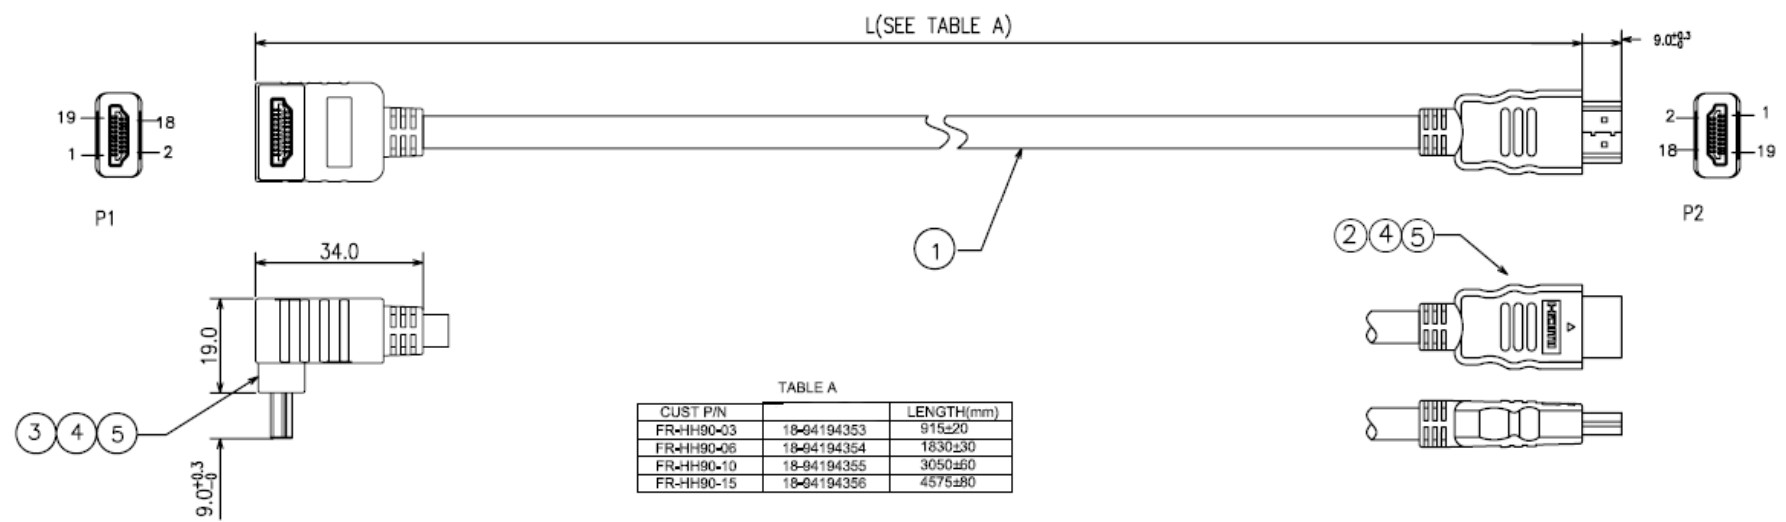


TABLE A

CUST P/N	FR	LENGTH(mm)
FR-HH90-03	18-94194353	915±20
FR-HH90-06	18-94194354	1830±30
FR-HH90-10	18-94194355	3050±60
FR-HH90-15	18-94194356	4575±80

PIN ASSIGNMENT:

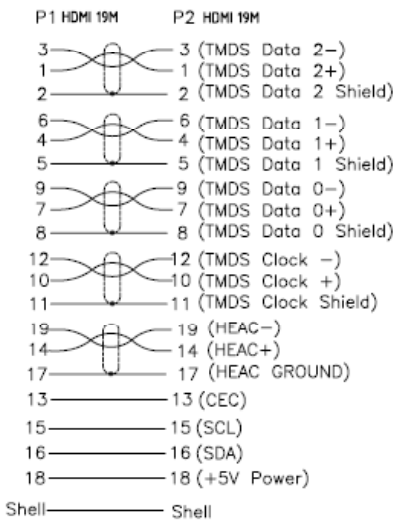

ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TEST
- HI-POT:DC300V 10ms
- Insulation Resistance:10 M OHM MIN
- Contact Resistance: 5 OHM MAX

5	OVERMOLD	PVC 70Pa UL94V-0,COLOR:BLACK	
4	INNERMOLD	PE LOW DENSITY	
3	HDMI CONN.	HDMI 19PIN AM BLACK Contact G/F金, SHELL G/F	
2	HDMI CONN.	HDMI 19PIN AM BLACK Contact G/F金, SHELL G/F	
1	HDMI CABLE	High Speed HDMI CABLE With Ethernet UL20276(1P*28#+D+AL+MYLAR)*5C+4C*28#+AL+D(裸銅)+B(85%,銅 類編織)OD7.3mm JACKET	

NO.	PART NAME	SPEC DESCRIPTION	REMAKE
INNERMOLD		Tolerance unless specified .000 ± .00 ± .0 ± 0.50 ANGLE ±	
OVERMOLD		DRAWN: jerry 2011/3/23 DESIGNER: CHECKED: APPROVED:	
		NAME: HDMI 90° TO HDMI 180° CABLE (28AWG)	SHEET: 1/1
		DRAWING NO. 18-94194353~56	REV 2.0
			SCALE: NON UNIT: mm